




慈溪市万捷电子有限公司




CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

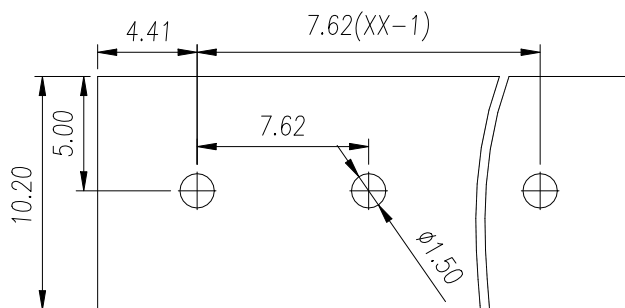

P.C.B. LAYOUT

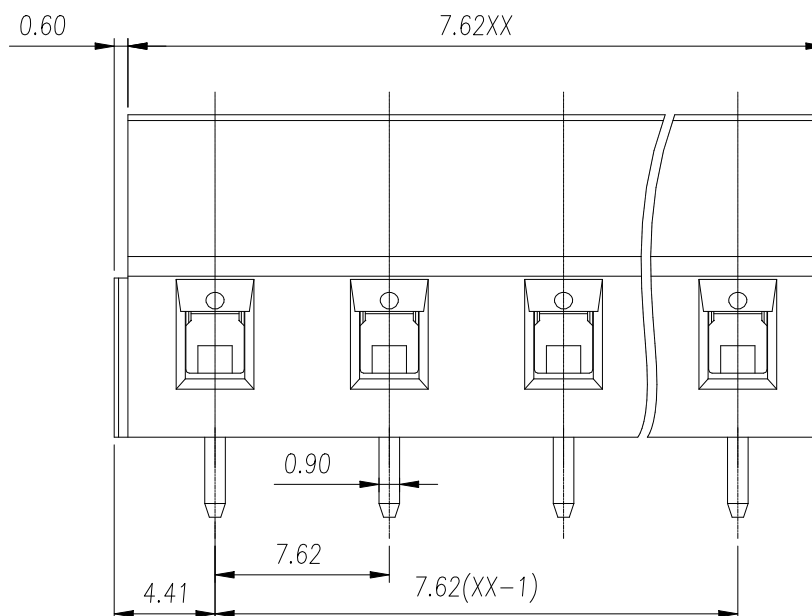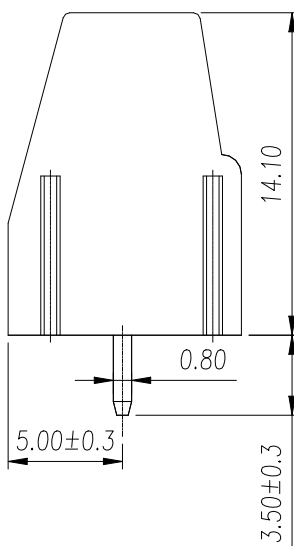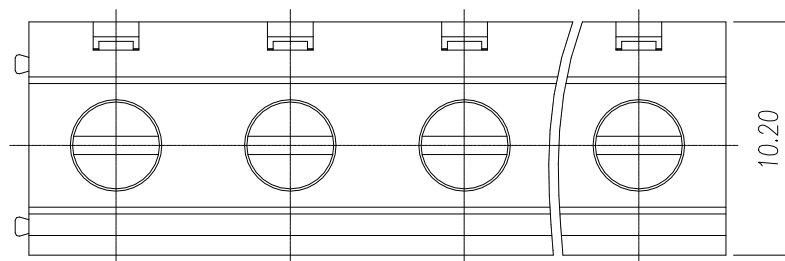

UL/CUL 技术参数	cRU [®] us			
UL/CUL Technical Data				
等级 Use Group	B	C	D	
额定电压 Rated Voltage [V]	300	-	300	
额定电流 Rated Current [A]	16	-	10	
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]				
耐电压 Withstanding Voltage	1600V/1Min			
IEC 技术参数	IEC60947-7-4			
IEC Technical Data				
过电压类别 Overvoltage Category	III	III	II	
污染等级 Contamination Class	3	2	2	
额定电压 Rated Voltage [V]	450	630	1000	
额定电流 Rated Current [A]	20	20	20	
额定冲击电压 Impulse withstand voltage [KV]	6.0	6.0	6.0	
导线截面积 Conductor cross section	0.5-2.5			
硬质/柔性导线 Solid/flexible [mm ²]				
材料 Material				
绝缘材料 Insulation Material	PA66			
阻燃等级 Imflammability	UL94V-0			
导体材料 Contact Material	铜合金 Copper alloy			
导体表面镀层 Contactive Coating	镀锡 Sn Plated			
一般参数 Other Data				
间距 Pitch / 极数 Poles [mm] / [P]	7.62 / 02~24			
剥线长度 Stripping Length [mm]	6~7			
螺丝 Screw/ 扭矩 Torque(Max) [N.m]	M2.5/0.4			
工作温度 Operating temperature [°C]	-40~105			
焊锡温度 Soldering temperature	260°C/5S			
引针尺寸 Pin Dimensions [mm]	0.8*0.9			
PCB板孔径 PCB Hole Diameter [mm]	Ø1.5			

linear dimension(Tolerances Standard GB/T 14486-2008)




variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	to 10	over 10 to 100	over 100 to 250
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位 / UNITS mm 尺寸 / SIZE A4 比例 / SCALE 3:1



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

第三视角 / THIRD ANGLE PROJECTION 版本 / REV V0



名称 / TITLE WJ128-7.62-XXP-1YY-00A