



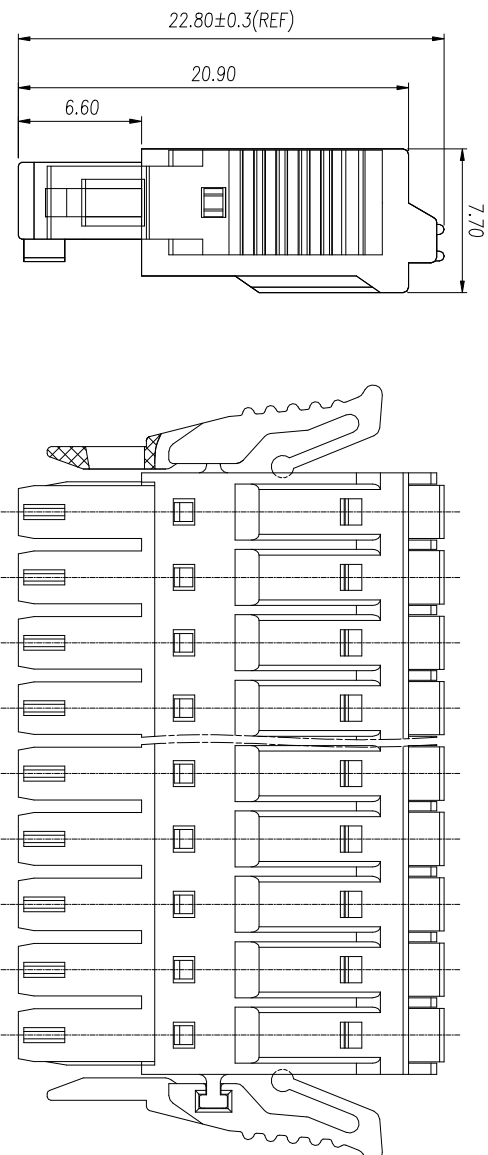

# 慈溪市万捷电子有限公司

## CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED DATE

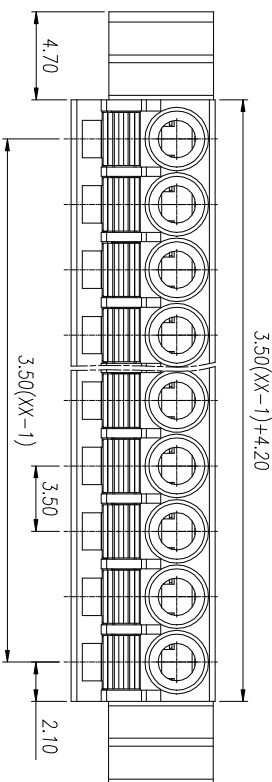

UL/CUL 技术参数		cULus	
UL/CUL Technical Data			
等级	Use Group	B	C D
额定电压	Rated Voltage	N	- 300
额定电流	Rated Current	A	- 8
接线范围	Wire Range	24-16	
单/多芯线	Solid/Stranded	[AWG]	
耐电压	Withstanding Voltage	1600V/Min	
IEC 技术参数			
IEC Technical Data			
过电压类别	Overvoltage Category	III	III II
污染等级	Contamination Class	3	2 2
额定电压	Rated Voltage	N	160 160 320
额定电流	Rated Current	A	8 8 8
额定冲击电压	Impulse withstand voltage	[kV]	25 25 25
导线截面积	Conductor cross section	0.2-1.5	
硬质/柔性导线	Solid/ flexible	[mm <sup>2</sup> ]	
材料	Material	PA66	
绝缘材料	Insulation Material	UL94V-0	
阻燃等级	Inflammability	铜合金	
导体材料	Conductor Material	镀锡 Sn Plated	
导体表面镀层	Contactive Coating	-	
一般参数 Other Data			
间距	Pitch / 极数	Poles	[mm]/[P]
剥线长度	Stripping Length		3.5/02-24
螺丝	Screw/扭矩	Torque(Max)	[N.m]
工作温度	Operating temperature	[°C]	-40~105
焊接温度	Soldering temperature		-
引针尺寸	Pin Dimensions		[mm]
PCB板孔径	PCB Hole Diameter		[mm]

linear dimension	Tolerances Standard GB/T 14486-2008									
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60
variable range	6 to 10	10 to 30	30 to 60	60 to 100	100 to 160	160 to 10	10 to 100	10 to 100	100 to 100	100 to 100

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	5:2
名称 / TITLE	第三视图/THIRD ANGLE PROJECTION				版本 / REV
名称 / TITLE	WJ15EDGKN-G-3.5-XXP-1YY-00A				V0



慈溪市万捷电子有限公司  
CIXI WANJIE ELECTRONIC CO., LTD